
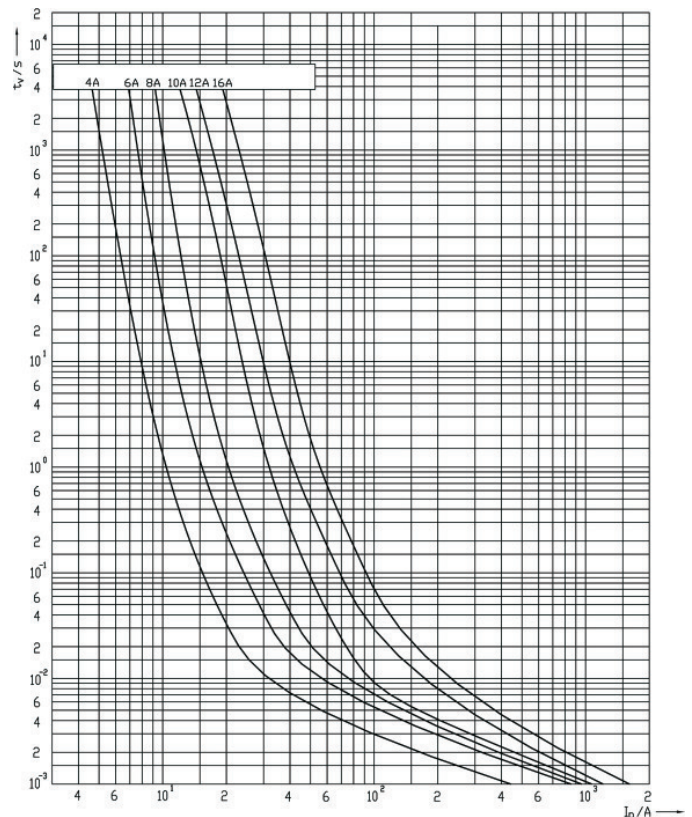


Allgemeine Eigenschaften

Bauform	10,3 x 38 mm
Spannung	1000V d.c L / R= 2ms
Ausschaltvermögen	30kA d.c.
Normen / Standards	IEC 60269 - 6 / UL 248
Applikation	Schutz von Photovoltaik Strings

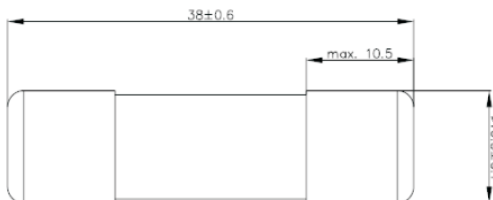

ES PV 10

Artikel - Nr.	Strom	Schmelzintegral [A ² s] L / R= 2 ms	Lösch Integral [A ² s] L / R= 2 ms	Verlustleistung in [W]
1.038.720	2	1,3	3,5	1,00
1.038.723	4	3,3	28	1,25
1.038.725	6	5,5	45	1,65
1.038.726	8	8	62	1,90
1.038.727	10	11	88	2,30
1.038.728	12	23	180	2,40
1.038.730	16	35	270	2,50
1.038.731	20	50	430	3,25
1.038.732	25 *	75	620	3,45
	* 900V			