



Verpackungsmöglichkeiten:


Ammopack 2.000 St. in der Schachtel
Ammopack 25.000 St. in der Schachtel

Packing options:

Ammo pack 2.000 pcs. per inner box
Ammo pack 25.000 pcs. per inner box.

Bemessungswerte / Ratings

Art.- No.	Strom Current	Spannung Voltage	Ausschaltvermögen Breaking capacity	Spannungsfall Voltage drop		Schmelzintegral Melting integral [A ² s]
				max [mV]		
888.317	1 A	250 V	35 A	280		0,340
888.318	1,25 A	250 V	35 A	280		0,844
888.319	1,6 A	250 V	35 A	250		1,280
888.320	2 A	250 V	35 A	240		2,760
888.321	2,5 A	250 V	35 A	200		3,813
888.322	3,15 A	250 V	35 A	180		4,961
888.323	4 A	250 V	35 A	160		8,800
888.324	5 A	250 V	35 A	150		12,750
888.325	6,3 A	250 V	35 A	150		26,195
888.327	10 A	250 V	35 A	150		103,000

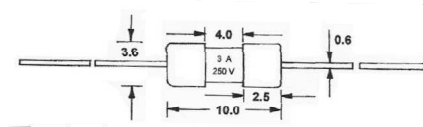

Schmelzeit-Grenzwert / Pre-arcing time limits

Bemessungsstrom Rated current	1,5 I _{rat} min..	2,1 I _{rat} max.	2,75 I _{rat}		4 I _{rat}		10 I _{rat} Max.
			min.	max.	min	max.	
500 mA – 10 A	1 h	30 min.	10 ms	3 s	3 ms	300 ms	20 ms